


**Conductor construction: see table**

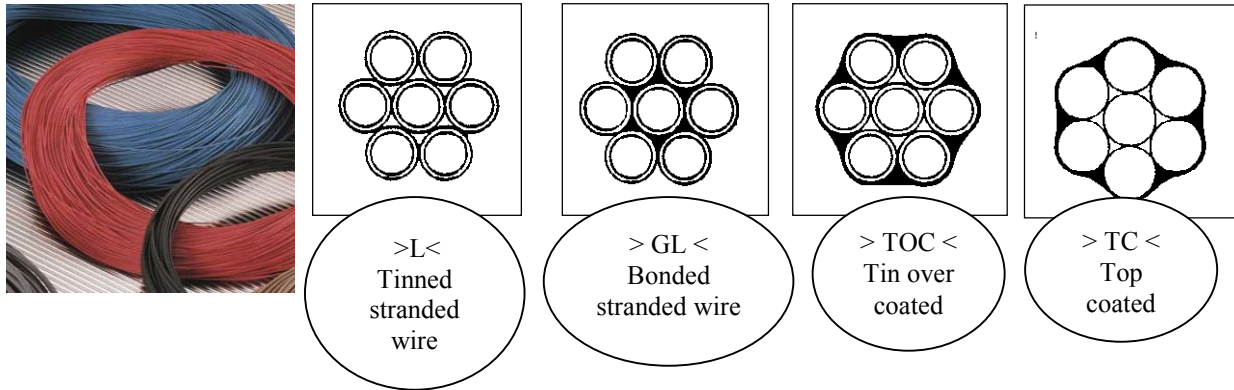

<b>UL/CSA Stranded Wires</b>			<b>Selection complying to UL/CSA PVC insulation</b>			
Rating Temp. ° C	Rating Voltage (V)	UL AWM style	CSA type	Insulation material	Insulation thickness (mm)	Size range (AWG)
80	30	<b>1571</b>	-----	PVC IR-PVC	0.15-0.25	36-24
80	300	<b>1007</b>	TR-64 90°C	PVC	0.38	UL ; 32-16 CSA ; 28-14
80	300	<b>1061</b>	AWM	SR-PVC	0.23	30-16
90	1,000	<b>1032</b>	TR-32	PVC	0.76	UL ; 30-9 CSA ; 24-10
105	1,500	<b>10346</b>	-----	PVC	0,76	28-16
105	300	<b>1007- 1569</b>	TR-64 90°C	PVC	0.38	UL ; 30-16 CSA ; 28-14
105	300	<b>1569</b>	-----	PVC	0,38	UL ; 30-10
		<b>1569</b>	TR-64 90°C	PVC	0,38	CSA ; 28-14 UL ; 30-10
105	600	<b>1015</b>	TEW	PVC	0.76	UL ; 30-9 CSA ; 26-10

Other UL- Styles and cross sections upon request.  
 All in >LF< lead free material available.