
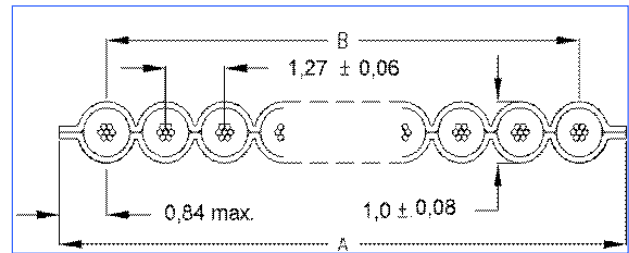


Conductor: AWG 28, CU-braid tinned, 7x0,1272 (7/36) 0,09mm²

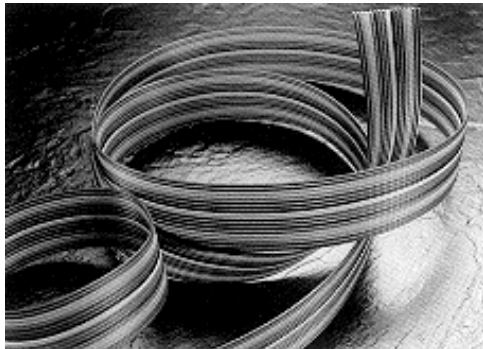

Colour combination complying to IEC:
 brown, red, orange, yellow, green, blue, violet,
 grey, white, black

Technical data

Temperature rating	: - 20° C ~ + 105° C
Voltage rating	: ≤ 300V / 50 Hz
Test voltage	: ≥ 1.500V / 50 Hz 1 min.
Current rating	: ≤ 1.2 A / 20° C
Insulation	: PVC, coloured complying to IEC
Carrier foil	: PVC – transparent
Flame retardant	: UL VW-1
Shore hardness	: 94 Shore (A) ± 3
Conductor resistance	: ≤ 240 Ω/km at 20° C
Insulation resistance	: ≥ 100 M Ω x km at 20° C
Capacity by 1 kHz (Ground-Signal-Ground)	: ≤ 60 pF/m
Inductance by 10 kHz (Ground-Signal-Ground)	: 0.6µH/m
Impedance (Ground-Signal-Ground)	: 110 Ω
Cross talk % (Cable length of 3m)	: NE 5.2 / FE 6.5
Delay time (Ground-Signal-Ground)	: 4.6 nsec/m
UL- STYLE	: 2651
CSA	: AWM I A/B 105°C, 300V, FT-1

Delivery program

Standard form of delivery: 30.5m on spools.

Order-No.	Conduct.- number	A	B
JFCR28L-09B127	9	11,84	10,16 ± 0,20
JFCR28L-10B127	10	13,11	11,43 ± 0,20
JFCR28L-14B127	14	18,19	16,51 ± 0,20
JFCR28L-15B127	15	19,46	17,78 ± 0,20
JFCR28L-16B127	16	20,73	19,05 ± 0,20
JFCR28L-20B127	20	25,81	24,13 ± 0,20
JFCR28L-25B127	25	32,16	30,48 ± 0,25
JFCR28L-26B127	26	33,43	31,75 ± 0,25
JFCR28L-34B127	34	43,59	41,91 ± 0,30
JFCR28L-37B127	37	47,40	45,72 ± 0,30
JFCR28L-40B127	40	51,30	49,53 ± 0,30
JFCR28L-50B127	50	63,91	62,23 ± 0,40
JFCR28L-60B127	60	76,61	74,93 ± 0,40
JFCR28L-64B127	64	81,67	80,01 ± 0,50