


Conductor: AWG 28, CU-braid tinned, 7x0,127 (7/36) 0,09 mm²

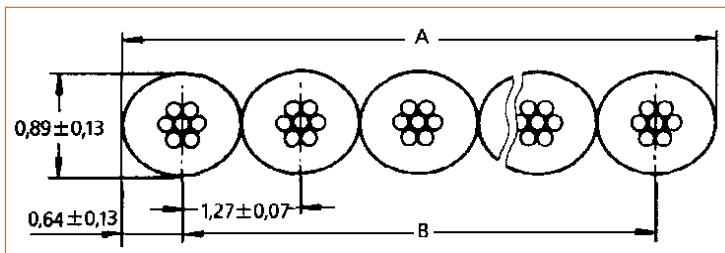

Colour combination complying to IEC Standard:
 brown, red, orange, yellow, green, blue, violet, grey,
 white, black

Technical data

Temperature rating	: - 20° C ~ + 105° C
Voltage rating	: ≤ 300V / 50 Hz
Test voltage	: ≥ 2000V / 50 Hz eff. 1 min.
Current rating	: ≤ 1.0 A / 20° C
Conductor insulation	: PVC- coloured fire resistant VW-1
Flame retardant	: UL VW-1
Resistance to cold	: - 40°C complying to MIL-W 16878E
Shore hardness	: 94 Shore (A) ± 3
Conductor resistance	: ≤ 228 Ω/km at 20° C
Insulation resistance	: ≥ 100 M Ω x km at 20° C
Capacity by 1 kHz (Ground-Signal-Ground)	: ≤ 45 pF/m
Impedance (Ground-Signal-Ground)	: 100 Ω
Cross talk % (Cable length of 3m)	: NE 3.8 / FE 6.0
Delay time (Ground-Signal-Ground)	: 4.2 ns/m
UL- STYLE	: 20029

Delivery program

Standard form of delivery: 30.5m on spools.

Order-No.	Conduct. number	A	B
JFCR28L-09BV127	9	11,43 ± 0,20	10,16 ± 0,20
JFCR28L-10BV127	10	12,70 ± 0,20	11,43 ± 0,20
JFCR28L-14BV127	14	17,78 ± 0,20	16,51 ± 0,20
JFCR28L-15BV127	15	19,05 ± 0,20	17,78 ± 0,20
JFCR28L-16BV127	16	20,32 ± 0,20	19,05 ± 0,20
JFCR28L-20BV127	20	25,40 ± 0,20	24,13 ± 0,20
JFCR28L-24BV127	24	30,48 ± 0,20	29,21 ± 0,20
JFCR28L-25BV127	25	31,75 ± 0,20	30,48 ± 0,20
JFCR28L-26BV127	26	33,02 ± 0,20	31,75 ± 0,20
JFCR28L-34BV127	34	43,18 ± 0,30	41,91 ± 0,30
JFCR28L-37BV127	37	46,99 ± 0,30	45,72 ± 0,30
JFCR28L-40BV127	40	50,80 ± 0,30	49,53 ± 0,30
JFCR28L-50BV127	50	63,50 ± 0,30	62,23 ± 0,30
JFCR28L-60BV127	60	76,20 ± 0,30	74,93 ± 0,30
JFCR28L-64BV127	64	81,28 ± 0,30	80,01 ± 0,30
JFCR28L-72BV127	72	91,44 ± 0,40	90,17 ± 0,40